

Applications include:

Building & Construction

Concrete Cure Monitoring
Building Services

Geotechnical

Dam Monitoring
Land Slip
Mining
Tunnels

Scientific & Research

Thermal Profiling
Thermistor Arrays
Static Load Testing

General Industry

Refrigeration Monitoring
Oven Calibration
Process Monitoring

¹ **FREE Software & Technical Support**

Increased channel capacity

Increasing the channel capacity of the *dataTaker* DT80 range is made very easy by adding *dataTaker* Channel Expansion Modules (CEM20). Each CEM20 connects 20 universal data logging channels to the *dataTaker* data logger. A *dataTaker* CEM20 connects to one analogue channel of the *dataTaker* data logger. This effectively expands the total channel capacity of the DT80 to 300 analog inputs and the DT85 to an incredible 900 inputs. Incorporating the same dual isolation technology as the DT80 range *dataTaker* data loggers each channel of the CEM20 can be used for two isolated inputs or three common reference inputs so the maximum inputs increases further.

| | <i>Four wire Isolated Input</i> | <i>Two wire Isolated Input</i> | <i>Two wire Common Reference Input</i> |
|-------------|---------------------------------|--------------------------------|--|
| DT80 | 100 | 200 | 300 |
| DT85 | 300 | 600 | 900 |

Easy set up and connection

Connecting a channel expansion module to a *dataTaker* data logger is very easy. The CEM20 is powered directly from the *dataTaker* data logger 12V output. Analog output connections of the CEM20 connect to an analog channel of the data logger. See sample wiring diagram shown.

Solid construction and design

The construction of the CEM20 is similar to the rugged *dataTaker* DT80 range. The case is made from an anodized aluminium extrusion with powder coated steel end plates. Removable screw terminals provide flexible options for installation and maintenance.

Compatibility

The *dataTaker* CEM20 is compatible with the following *dataTaker* data loggers: *dataTaker* DT80 Series 2, *dataTaker* DT80G Series 2, *dataTaker* DT85 Series 2 & *dataTaker* DT85G Series 2.

www.datataker.com



- » Compact size
- » Cost effective method of adding analog channels to a data logger
- » Extremely low power
- » Each CEM20 multiplexes 20 analog channels into one analog channel on the data logger

Warranty: All *dataTaker* Data Loggers are covered by a 3 year warranty on workmanship and parts. For further information on the *dataTaker* range, or for useful downloads, visit the *dataTaker* web site at www.datataker.com or contact your nearest *dataTaker* office or distributor.

Quality Statement: *dataTaker* operates a Quality Management System complying with ISO9001:2000. It is *dataTaker's* policy to supply customers with products which are fit for their intended purpose, safe in use, perform reliably to published specification and are backed by a fast and efficient customer support service.

Trademarks: *dataTaker* is a registered trademark.

Specifications: *dataTaker* reserves the right to change product specifications at any time without notice. **Designed and Manufactured in Australia.**

Proven relays from the DT80 range provides excellent isolation between channels and resistance to over volt age damage. Maximum sample speed is 12Hz.

Internal RTD temperature reference allows very accurate thermocouple measurements.

Status LED indicates measurement activity and is a useful commissioning and troubleshooting aid.

Simple address configuration by 4-way DIP switch.

20 analog input channels for sensors supported by DT80 range loggers, includes thermocouples, VWSG, RTDs, 4-20mA loops, voltage, resistance, frequency etc.



Connections to Logger

Digital control connections: 5D & 6D in/out terminals
 Power Connections: 12V & DGND twin terminals
 Analog Connections: *, +, -, #
 Each CEM20 attached to a logger uses a separate 4 wire analog channel on the logger.
 Maximum distance between logger and last CEM20: 100m
 Maximum number of CEM20 units per data logger:
 DT80 & DT80G (Series 2 only): 5
 DT85 & DT85G (Series 2 only): 15

Multiplexer

Type: Relay multiplexer
 Maximum Input Voltage: 30Vdc
 Maximum Sampling Speed: 12Hz

System

Status LED: Sample activity
 Address Selection: 4-way DIP switch. Address 1-15

Power Supply

Recommended: Logger's switched 12V output
 Alternative: External regulated 12Vdc ± 5%
 Power Consumption
 Sampling: 0.36W (12V 30mA)
 Idle: CEM20 is automatically turned off when not sampling.

Physical and Environment

Construction: Powder coated steel and anodized aluminium
 Dimensions: 180 x 100 x 50mm
 Weight: 0.55kg
 Temperature Range: -45°C to 70°C
 Humidity: 85% RH, non-condensing

Assessories Included

Analog and control cables for connection to the dataTaker data logger.

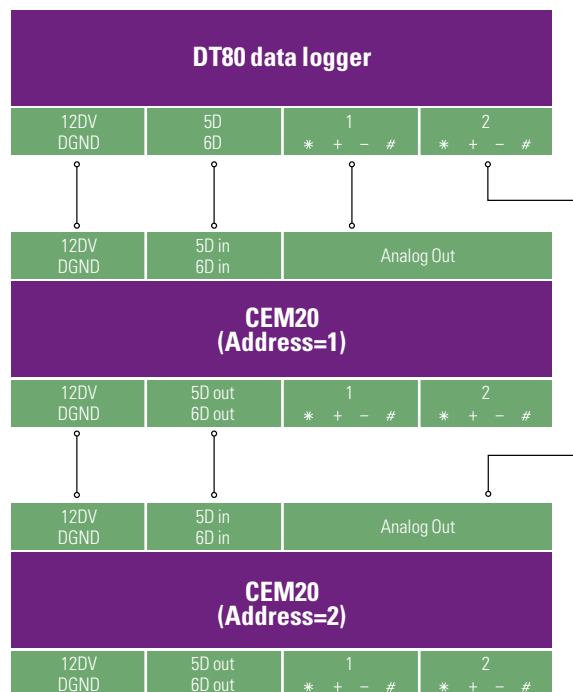


Diagram shows functional connections for DT80 data logger and two CEM20 units. Cable lengths should always be kept as short as possible to minimise noise and signal losses.

INDUSTRIE AUTOMATION GRAZ

Autaler Straße 55, 8074 Raaba
 Telefon: +43 (316) 405 105
 Telefax: +43 (316) 405 105 22
 E-Mail: office@iag.co.at
 Internet: www.iag.co.at