




Vane wheel flow sensor ZS25 with integrated, configurable transducer UFA in a flameproof enclosure for applications in explosive atmospheres

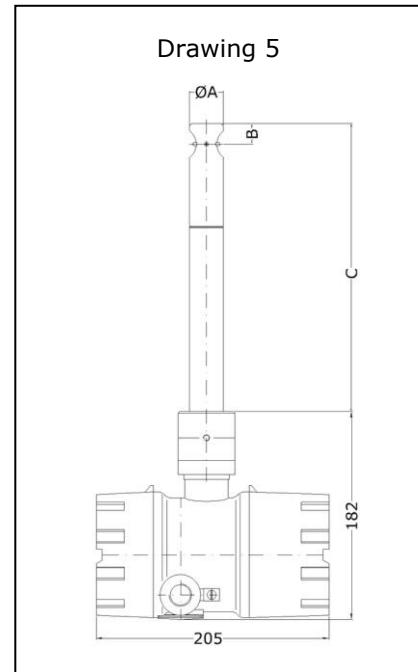

ZS25 ZG5 Ex-d

Measured variables

- (actual) flow velocity v [m/s] and
- (actual) flow rate [m^3/h] in air/gases and water/liquids
- conversion to standard velocity/standard volume flow with input parameters pressure and temperature

Design

- insertion probe with flameproof enclosure

Examples of application

- flow measurement of air, exhaust gas, process gas, ...
- in processes with varying and/or unknown gas compositions
- flow monitoring in pharmaceutical installations
- monitoring neutralisation processes
- measurement of flammable liquids
- measuring in non-conductive liquids such as ultra pure water, for example in the semiconductor industry

- compact unit for explosive atmospheres with optional local display
- applications in Category 1 (Zone 0 and 20); transducer housing approved for Category 2 (Zone 1 and 21)
- no external isolation/supply unit necessary

Measuring ranges

- 0.3 ... 120 m/s air/gases
- 0.03 ... 10 m/s water/liquids

Functional principle

- vane wheel flow sensor
- sensing the vane rotation; non-contact inductive proximity switch

Particles and humidity

- particles may restrict the fatigue strength of the vane wheel set
- relative gas humidity of less than 100 % does not affect the measurement uncertainty

Media

- air, gas mixtures and clean gases
- water/liquids with viscosities up to 200 cSt

Advantages

- accurate values even in varying and/or unknown gas compositions



Model designation / order code (example)

ZS25/25	-350	GF	E	350	p10	ZG5	Ex-d
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

Basic types

Type	Article No.
'stainless steel 100 °C'	
ZS25/25- 250 GFE/100/p10/ZG5 Ex-d	B002/255
ZS25/25- 350 GFE/100/p10/ZG5 Ex-d	B002/256
ZS25/25- 450 GFE/100/p10/ZG5 Ex-d	B002/257
ZS25/25- 550 GFE/100/p10/ZG5 Ex-d	B002/258
ZS25/25- 650 GFE/100/p10/ZG5 Ex-d	B002/259
'stainless steel 260 °C'	
ZS25/25- 250 GFE/260/p10/ZG5 Ex-d	B002/260
ZS25/25- 350 GFE/260/p10/ZG5 Ex-d	B002/261
ZS25/25- 450 GFE/260/p10/ZG5 Ex-d	B002/262
ZS25/25- 550 GFE/260/p10/ZG5 Ex-d	B002/263
ZS25/25- 650 GFE/260/p10/ZG5 Ex-d	B002/264
'stainless steel 370 °C'	
ZS25/25- 250 GFE/370/p10/ZG5 Ex-d	B002/265
ZS25/25- 350 GFE/370/p10/ZG5 Ex-d	B002/266
ZS25/25- 450 GFE/370/p10/ZG5 Ex-d	B002/267
ZS25/25- 550 GFE/370/p10/ZG5 Ex-d	B002/268
ZS25/25- 650 GFE/370/p10/ZG5 Ex-d	B002/269
'stainless steel 500 °C'	
ZS25/25- 250 GFE/500/p10/ZG5 Ex-d	B002/270
ZS25/25- 350 GFE/500/p10/ZG5 Ex-d	B002/271
ZS25/25- 450 GFE/500/p10/ZG5 Ex-d	B002/272
ZS25/25- 550 GFE/500/p10/ZG5 Ex-d	B002/273
ZS25/25- 650 GFE/500/p10/ZG5 Ex-d	B002/274
'titanium 100 °C'	
ZS25/25- 250 GFT/100/p10/ZG5 Ex-d	B002/280
ZS25/25- 350 GFT/100/p10/ZG5 Ex-d	B002/281
ZS25/25- 450 GFT/100/p10/ZG5 Ex-d	B002/282
ZS25/25- 550 GFT/100/p10/ZG5 Ex-d	B002/283
ZS25/25- 650 GFT/100/p10/ZG5 Ex-d	B002/284
'titanium 260 °C'	
ZS25/25- 250 GFT/260/p10/ZG5 Ex-d	B002/285
ZS25/25- 350 GFT/260/p10/ZG5 Ex-d	B002/286
ZS25/25- 450 GFT/260/p10/ZG5 Ex-d	B002/287
ZS25/25- 550 GFT/260/p10/ZG5 Ex-d	B002/288
ZS25/25- 650 GFT/260/p10/ZG5 Ex-d	B002/289



Basic types (cont'd)

Type	Article No.
'titanium 370 °C'	
ZS25/25- 250 GFT/370/p10/ZG5 Ex-d	B002/290
ZS25/25- 350 GFT/370/p10/ZG5 Ex-d	B002/291
ZS25/25- 450 GFT/370/p10/ZG5 Ex-d	B002/292
ZS25/25- 550 GFT/370/p10/ZG5 Ex-d	B002/293
ZS25/25- 650 GFT/370/p10/ZG5 Ex-d	B002/294

(1) Sensor type / diameter

Vane wheel flow sensor ZS25 with sensor Ø 25 mm and shaft Ø 25 mm

(2) Sensor length - measurement C (see Drawing 5, Page 1)

250 / 350 / 450 / 550 / 650 mm

(3) Medium

... GF ...	air/gases and water/liquids
------------	-----------------------------

(4) Materials in contact with the medium

Design	Material
... E ... stainless steel	stainless steel 1.4404 / AISI 316L, ceramics Al ₂ O ₃ 99.9 % design '100 °C': VITON®, PTFE seal design '260 °C': PTFE seal design '370 °C' and '500 °C': pure graphite seal
... T ... titanium	titanium 3.7035 (Grade 2), ceramics Al ₂ O ₃ 99.9 % design '100 °C': VITON®, PTFE seal design '260 °C': PTFE seal design '370 °C' and '500 °C': pure graphite seal

(5) Permissible temperature of the medium

Design	Temperature
... 100 ...	-20 ... +100 °C (constant)
... 260 ...	-40 ... +260 °C (constant) -40 ... +300 °C (short-term)
... 370 ...	-40 ... +370 °C (constant) -40 ... +400 °C (short-term)
... 500 ...	-40 ... +500 °C (constant) -40 ... +550 °C (short-term)

Ambient temperature

-20 ... +50 °C



(6) Maximum working pressure

up to 10 bar / 1 MPa kPa overpressure
(higher working pressure on request)

(7) Design

as in Drawing 5 (Page 1)

dimensions

A Ø 25 mm

B 13.9 mm

C 250/350/450/550/650 mm

(8) ATEX protection

for gas	: Ex II 1/2 G Ex ia/d e [ia] IIC T6 Ga/Gb
for dust	: Ex II 1/2 D Ex ia/tb IIIC TX Da/Db
sensor	: Category 1 (Zone 0 or 20)
transducer housing	: Category 2 (Zone 1 or 21)

Measuring range / vane wheel type

Measuring range air/gases*	Measuring range water/liquids**	Vane wheel type			Article No.
with 'stainless steel' probe					
0.4 ... 20 m/s	0.04 ... 7.5 m/s	mn	20	E	V_MN20GFE
0.5 ... 40 m/s	0.05 ... 10 m/s	mn	40	E	V_MN40GFE
1.0 ... 80 m/s	0.08 ... 10 m/s	mn	80	E	V_MN80GFE
1.4 ... 120 m/s	0.10 ... 10 m/s	mn	120	E	V_MN120GFE
with 'titanium' probe					
0.3 ... 20 m/s	0.03 ... 7.5 m/s	mn	20	T	V_MN20GFT
0.4 ... 40 m/s	0.04 ... 10 m/s	mn	40	T	V_MN40GFT
0.8 ... 80 m/s	0.06 ... 10 m/s	mn	80	T	V_MN80GFT
1.2 ... 120 m/s	0.08 ... 10 m/s	mn	120	T	V_MN120GFT

Measurement uncertainty	for air/gases and water : < 1.5 % of measured value + 0.5 % FS
Repeatability	for air/gases and water : ±(0.05 % FS + 0.02 m/s)

* with an air/gas density of approx. 1.2 kg/m³

** the specified measuring ranges for applications in liquids are only practicable as long as there is no cavitation around the vane wheel



Ex-d transducer housing

Dimensions	outside diameter/length/height: approx. 110/205/182 mm
Material	aluminium cast alloy max. 0.5 % Mg, coated
Protection	IP68, IEC 529 and EN 60 529
Connection	glands for shielded cables with outside diameter 5 ... 9 mm; contacting of overall screen on the ground terminal in the housing; via "Ex-e" screw terminals for wires with cross-section 0.14 – 1.5 mm ²
Alignment	rotatable by approx. 350 ° and lockable
Setup	dual chamber system consisting of: 1) electronics in Ex-d protection (flameproof enclosure) 2) connections in Ex-e protection (increased safety) with terminal block and cable glands

Electromagnetic Compatibility (EMC)

according to EN 61 000-6-2 / IEC77

Installation position

any

Transducer UFA integrated in the connection housing

Analog output flow	4 ... 20 mA resistance max. 500 Ohm
Output limit value or quantity pulse	potential-free relay contact (normally-open), max. 300 mA / 27 VDC
Communication port	HART® via modem adapter for PC connection and UCOM PC software UCOM (see Accessories)
	output signals are electrically isolated from the power supply
Self-monitoring	parameter settings, sensor interface; in the case of error: analog output < 3.6 mA
Power supply	24 V DC (20 ... 27 V DC)
Power consumption	less than 5 W
Setting parameters (selection depending on parameter set)	analog output, time constant, profile factor, tube inside diameter, limit value or quantity pulse (rating adjustable), switchover actual/standard flow with parameters 'working pressure' and 'working temperature'



Accessories (optional)

	Description	Article No.
LCD display	1st row: 'instantaneous value': flow rate or flow velocity 2nd row: 'counter' or 'error code' 2 x 16-digit, character height 5.5 mm, working temperature range -20 ... +50 °C display rotatable in 90 °-stages on removing the Ex-d housing window cover	A010/520
Calibration certificate v/FA		KLB
HART® modem adapter	for changing setting parameters, for PC-USB connection	A010/101
PC software UCOM	for configuring the transducer via RS232	A010/052



Ex-d transducer housing
with optional LCD display




Accessories (cont'd)


Probe guide piece	Description	Article No.
SFB 25 E-70 / F-DN50 PN16 ZG1 Drawing 1, Page 8	for any repeated positioning with lower pressures above atmospheric (max. 2 bar / 200 kPa) / subatmospheric pressures, working temperature range -40 ... +550°C, through hole 25 mm, to single ended flange nipples or ball valve with flange, probe attachment by clamping bush, materials: stainless steel, graphite, flange DN50 PN16 in conformity with DIN, installation length L 70 mm	B004/110
SFK 25 E-50 / G 1 1/4" ZG2 with clamping yoke Drawing 2, Page 8	for any repeated positioning even with higher excess pressure (max. 10 bar/1 MPa) / low pressure, through hole 25 mm, connection by screw thread sleeve or ball valve inside thread G 1 1/4", working temp. range -20 ... +240 °C, installation lenght 50 mm, materials: stainless steel, VITON® lip-seal, VITON® O-ring	B004/211
SFB 25 E-54 / G 1 1/4" ZG5 with clamping bush Drawing 5, Page 8	for any repeated positioning with marginal excess pressure (max. 2 bar/ 200 kPa) / low pressure, through hole 25 mm, connection by screw thread sleeve or ball valve with inside thread G 1 1/4", working temp. range -20 ... +240 °C, intallation length 54 mm, materials: stainless steel, VITON®, PTFE clamping bush	B004/510




Probe guide piece
Drawing 1

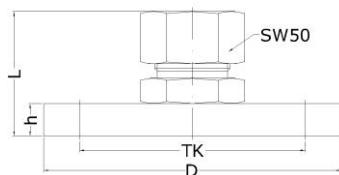


Probe guide piece
Drawing 2




Probe guide piece
Drawing 5



Ex zone 0
category 1



Ex zone 1
category 2

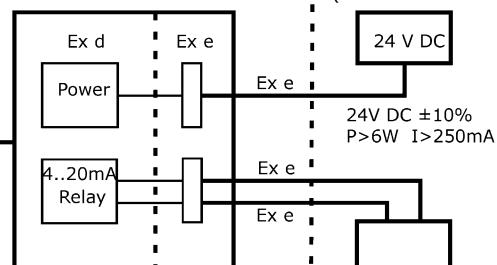

safe area
non-Ex zone

power supply
(without Ex-certification)

24 V DC

24V DC ±10%
 $P > 6W$ $I > 250mA$

data logging
(without Ex-certification)

Diagram of Ex-Zones

- ® Registered trademark:
Dupont: VITON
HART: HART Communication Foundation