

Insertion Flow Meter Series 454FTB-WGF

The Kurz WGF single-point insertion flow meter for **condensing gas environments** includes the qualities and features found in all Kurz constant temperature thermal flow meters that make them outperform all other currently available thermal mass flow meters, including:

- The first thermal mass flow meter offering accurate and reliable condensing gas flow measurements (patent pending)
- The highest repeatability, accuracy, and reliability available
- The fastest response to temperature and velocity changes in the industry
- Constant temperature thermal technology
- Interchangeable sensor and electronics (single circuit board) — no matched sets
- Built-in dry gas flow calculation on all flow units for saturated processes
- Continuous self-monitoring electronics that verify the integrity of sensor wiring and measurements
- Insensitive to left or right installations
- Sensor does not overheat at zero flow using a unique constant temperature control method and power limiting design
- Zero velocity as a valid data point
- Completely field configurable using the flow meter user interface or via a computer connection
- User-programmable correction factors to compensate for velocity profiles
- Velocity-temperature mapping for wide ranging velocity and temperature or user-programmable dual gas mix interpolation
- Sensor Blockage Correction Factor (SBCF)
- Patent US 7,418,878

Kurz Instruments is dedicated to manufacturing and marketing the best thermal mass flow meters available and to support our customers in their efforts to improve their businesses.

Applications

- Biogas
- Wastewater facilities
- Landfill sites
- Fogging in stacks
- Fan inlets
- EPA greenhouse gas emissions



Kurz Instruments, Inc.
2411 Garden Road
Monterey, CA 93940
800-424-7356
www.kurzinstruments.com



SPECIFICATIONS

- **Velocity range**
0 to 4,000 SFPM (18.6 NMPS) (Air)
0 to 2,000 SFPM (14 NMPS) (50/50 Biogas)
0 to 2,000 SFPM (9.3 NMPS) (CH₄)
Higher velocities available with reduced condensate immunity
- **Velocity accuracy** (laboratory conditions)
± (1% of reading +20 SFPM)
- **0.25% reading repeatability**
- **Velocity time constant**
1.5 second for velocity changes at 4,000 SFPM (constant temp)
- **Process temperature time constant**
10 seconds for temp changes at 1,000 SFPM (constant velocity)
- **Velocity-dependent correction factors for flow rate**
- **Electronics operating temperature**
Integral display
-13°F to 149°F (-25°C to 65°C)
Remote aluminum display
-40°F to 149°F (-40°C to 65°C)
Remote polycarbonate display
-13°F to 122°F (-25°C to 50°C)

PROCESS CONDITIONS

- **Process pressure rating**
Up to 150 PSIG (10 BARg)
- **Process temperature rating**
-40°F to 248°F (-40°C to 120°C)

APPROVALS

- **EPA mandatory GHG certification**
40 CFR 98.34(c)(1)
- **Alarm output conformity**
NAMUR NE43
- **European Union CE compliance**
EMC, LVD, PED, ROHS, and WEEE
- **CSA, ATEX & IECEx approvals for Nonincendive, Flameproof, and Explosion-proof** (ATEX flameproof pending)
EN IEC 60079-0, EN IEC 60079-1
EN IEC 60079-15, EN IEC 61241-1,
Class 1, Div 1 and 2

TRANSMITTER FEATURES

- **Aluminum (Type 4, IP66) dual chamber polyester powder-coated enclosure**
- **Optically-isolated loop powered 4-20mA output**
12-bit resolution and accuracy
Maximum loop resistance is
300Ω at 18 VDC, 550Ω at 24 VDC,
1400Ω at 36 VDC
- **Input power**
AC (85-265V 47/63 Hz, 24 watts max.)
or DC (24 V ±10%), 1 A max.
- **Integral or remote user interface**
- **Easy-to-use interface**
Backlit display / keypad
2-lines of 16-characters each
- **User-configurable flow display (scrolling or static)**
- **User-configurable English or metric units for mass flow rate, mass velocity, and process temperature**
°C, °F, KGH, KGM, NCMH, NLPM, NMPS, PPH, PPM, SCFH, SCFM, SCMh, SFPM, SLPM, SMPS
- **Built-in dry gas flow calculation for saturated processes**
- **User-programmable dual gas mix interpolation**
- **Built-in zero-mid-span drift check**
- **Built-in flow totalizers and elapsed time**
- **User-configurable digital filtering from 0 to 600 seconds**
- **Configuration/data access**
USB, RS-485 Modbus, or HART
- **Meter memory**
200 recent events, top 20 min/max, and 56 hours (10 second samples of trends)
- **3-year warranty**

SUPPORT & ELEMENT COMPONENTS

- **Sensor material**
C-276 alloy all-welded sensor construction (standard)
- **Sensor support**
316L stainless steel (standard)
C-276 alloy (optional)
- **Sensor support diameter**
3/4" and 1" (19 mm and 25mm)
- **Sensor support length**
6" to 60" (152 mm to 1524 mm)
- **3-year warranty**


OPTIONS

- **Adjustable display/keypad orientation**
- **Remote wall-mount enclosure: aluminum (Type 4 IP66 for Ex d) or polycarbonate (Type 4 IP54 for Ex n)**
- **HART communication, v7 FSK**
Process control industry standard allows remote configuration, diagnostic monitoring, and online testing with handheld configurators
- **One 4-20mA non-isolated analog input**
- **Two optically isolated solid-state relays / alarms**
Configurable as alarm outputs, pulsed totalizer output, or air purge cleaning
- **Flow valve PID controller and configurable control application**
Permits controlling set point velocity or flow rate through available control valve, damper, or 4-20mA interface
- **Two digital inputs dedicated to purge and zero-mid-span drift check**
- **Pulsed output as a remote flow totalizer**
- **Hardware accessories**
Available hardware includes flanges, ball valves, restraints, retractors, cable glands, conduit seals, cable, compression fittings, packing glands, and branch fittings





SERIES 454FTB-WGF OUTLINE DRAWINGS

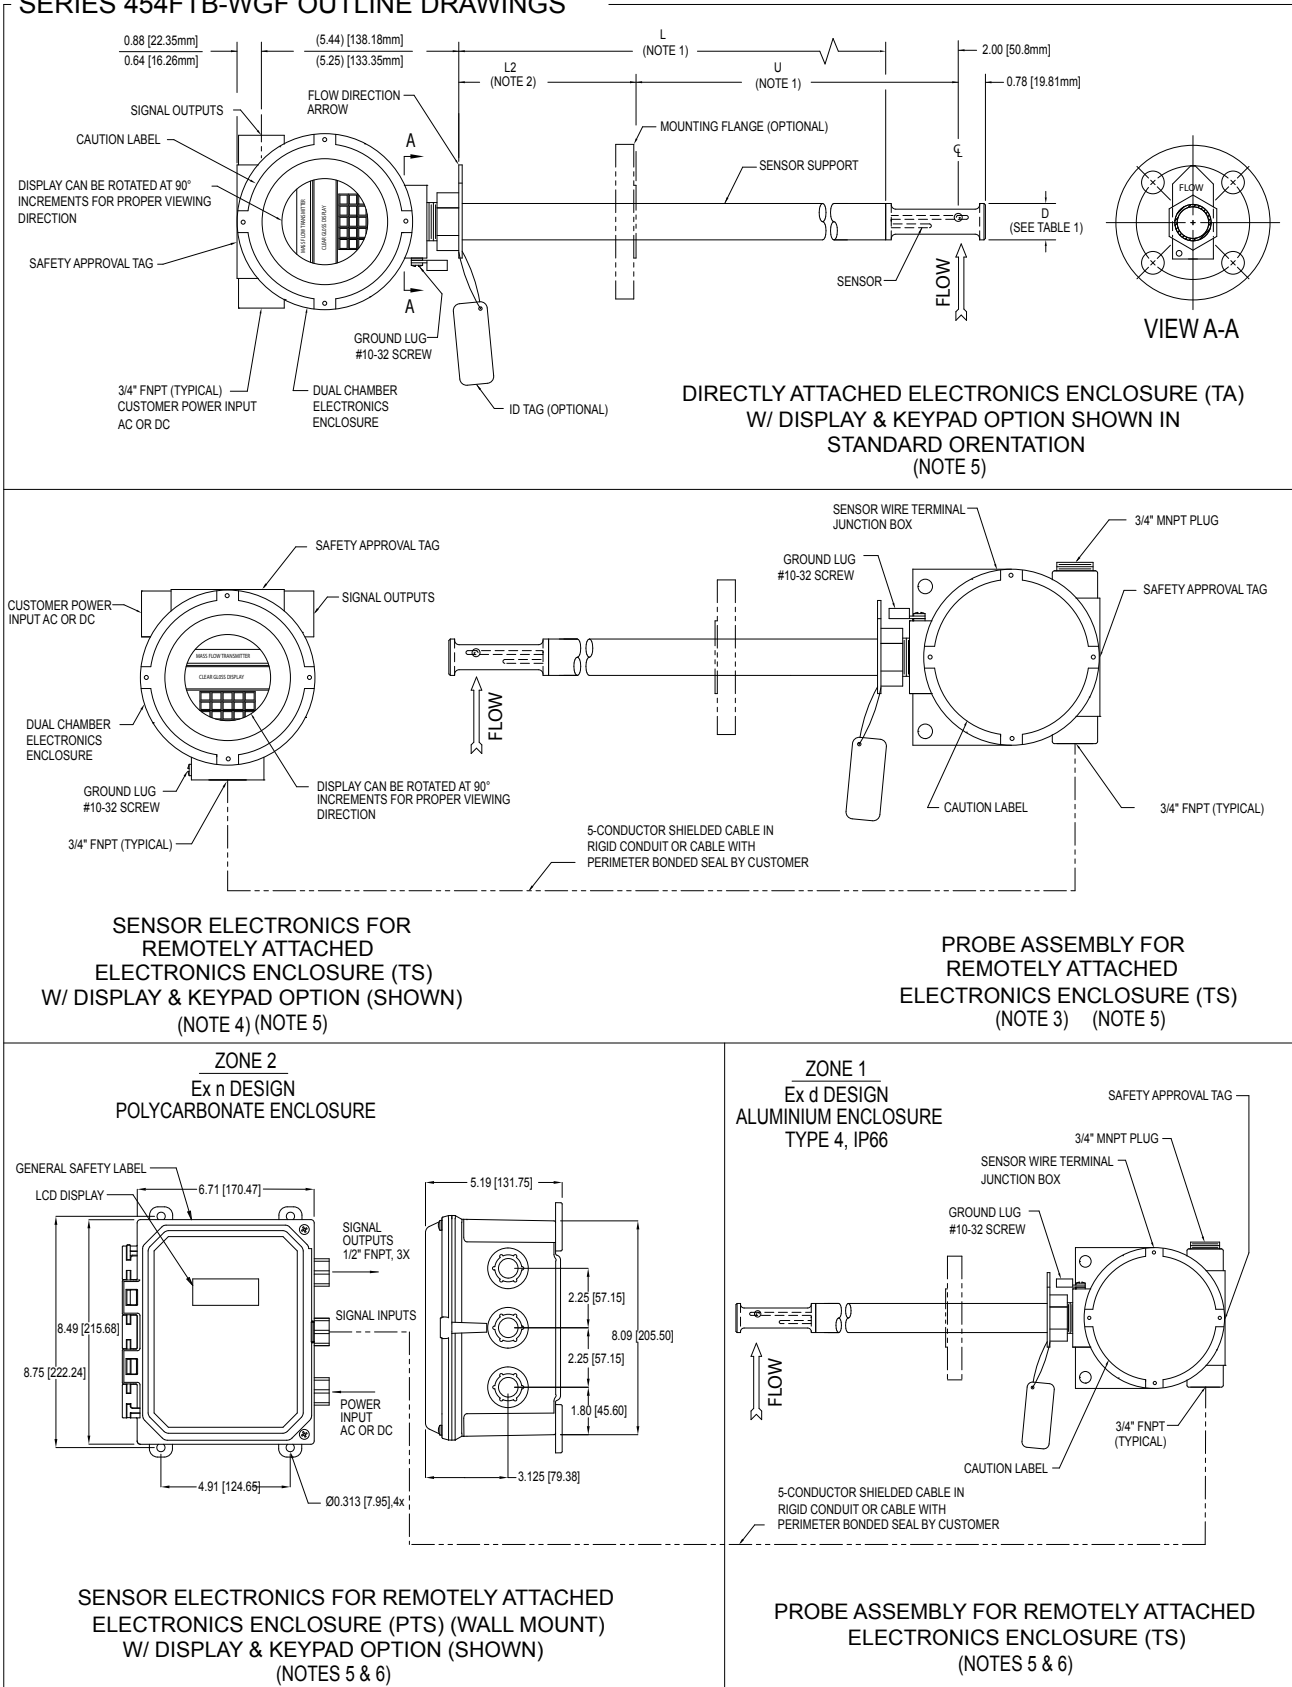



SERIES 454FTB-WGF OUTLINE DRAWINGS (cont'd)

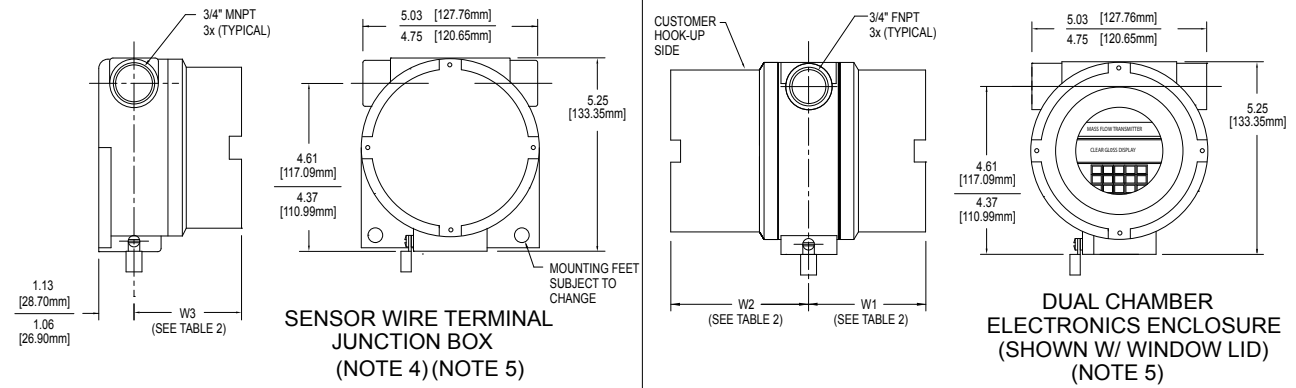


TABLE 1. PROBE DIAMETER DIMENSION

MODEL NO.	D
-12	0.75 [19.05mm]
-16	1.00 [25.4mm]

TABLE 2. ENCLOSURE DIMENSION (NOTE 5)

INPUT POWER	DISPLAY / KEYPAD	W1 (MAX.) (MIN.)	W2 (MAX.) (MIN.)	W3 (MAX.) (MIN.)
AC	YES	3.63 [92.20mm]	5.01 [127.25mm]	N/A
		3.41 [86.61mm]	4.69 [119.13mm]	
AC	NO	3.16 [80.26mm]	5.01 [127.25mm]	N/A
		2.81 [71.37mm]	4.69 [119.13mm]	
24VDC	YES	3.63 [92.20mm]	5.01 [127.25mm]	N/A
		3.41 [86.61mm]	4.69 [119.13mm]	
24VDC	NO (NOTE 4)	N/A	N/A	5.01 [127.25mm]
				4.88 [123.95mm]
SENSOR WIRE TERMINAL J-BOX (FOR REMOTE OPT.)		N/A	N/A	3.16 [80.26mm]
				2.81 [71.37mm]

NOTES:

- 1) FOR FLANGED OPTION: L = (U + L2 - 2.00 [50.8mm]), U (MIN.) = 4.00 [101.6mm].
- 2) L2 (MIN.) FOR -HT TO BE 5.00 [127mm].
- 3) THIS PROBE CONFIGURATION ALSO USED FOR DIRECTLY ATTACHED, DC POWERED, NO DISPLAY.
- 4) SENSOR WIRE TERMINAL JUNCTION BOX USED FOR SENSOR ELECTRONICS FOR DC POWERED, NO DISPLAY.
- 5) ENCLOSURE STYLES AND DIMENSIONS ARE SUBJECT TO CHANGE.
- 6) THIS CONFIGURATIONS ALLOWS FOR PROBE ASSY TO BE MOUNTED IN ZONE 1 AREA AND FOR REMOTE ELECTRONICS TO BE MOUNTED IN ZONE 2 AREA.



756 4 1 0
Parent number

F1

F2

F3

F4

F5

F6

F7

F8

F9

F10

F11

F12

F13

Parent Number	Model
756410	454FTB-WGF

F1	Option	Probe Support Diameter
	B	0.75" (19 mm) (6" – 36" probe length)
	C	1" (25 mm) (6" – 60" probe length)

F2	Option	Probe Support & Flange Material
	2	316L stainless steel
	3	C-276 alloy

F3	Option	Probe Support Length
	B	6" (152 mm) (0.75" or 1" probe)
	C	9" (229 mm) (0.75" or 1" probe)
	D	12" (305 mm) (0.75" or 1" probe)
	F	18" (457 mm) (0.75" or 1" probe)
	H	24" (610 mm) (0.75" or 1" probe)
	J	30" (762 mm) (0.75" or 1" probe)
	K	36" (914 mm) (0.75" or 1" probe)
	M	48" (1219 mm) (1" probe)
	P	60" (1524 mm) (1" probe)

F4 Compression Fittings or Flanges
Choose one only - None, Compression Fitting, or Flange

Option	Compression Fittings
1A	None
2B	0.75" MNPT (0.75" probe only), stainless steel front and back ferrules
2D	0.75" MNPT (0.75" probe only), PTFE-compound front and back ferrules
2G	1" MNPT (0.75" or 1" probe), stainless steel front and back ferrules
2J	1" MNPT (0.75" or 1" probe), PTFE-compound front and back ferrules

Option 1 Class 150 lbs.	Option 2 Class 300 lbs.	ANSI 16.5 Flange	0.75" and 1" probe diameter
1A	1A	None	
3D	4E	0.75" (19 mm)	1" probe
3F	4G	1" (25 mm)	
3J	4K	1.5" (38 mm)	
3L	4M	2" (51 mm)	
3N	4P	2.5" (64 mm)	
3S	4T	3" (76 mm)	
3U	4V	4" (102 mm)	

F5	Option	Flange U Dimension
	---	Enter 000 for no flange connection. Enter U-dimension to nearest 10th of an inch without a decimal point. For example, 7.7" is 077 and 23.6" is 236. Note: Convert metric units to English units.

F6	Option	Electronics Configuration (ATEX Flameproof Pending)
	A	Integral - Standard Display viewing Aluminum Type 4, IP66 enclosure Explosion-Proof / Flame-Proof sensor: CSA, ATEX, and IECEx Ex d IIB + H2 Gb, T6, T4, T1 10°C or T130°C (electronics enclosure) Ex d IIB + H2 Gb, T4 or T3 (sensing element)
	E	Integral - Display rotated 180° for viewing Aluminum Type 4, IP66 enclosure Explosion-Proof / Flame-Proof sensor: CSA, ATEX, and IECEx Ex d IIB + H2 Gb, T6, T4, T1 10°C or T130°C (electronics enclosure) Ex d IIB + H2 Gb, T4 or T3 (sensing element)
	J	Remote - Transmitter and sensing element separate Aluminum Type 4, IP66 enclosures Explosion-Proof / Flame-Proof sensor: CSA, ATEX, and IECEx Ex d IIB + H2 Gb, T6, T4, T1 10°C or T130°C (electronics enclosure) Ex d IIB + H2 Gb, T4 or T3 (sensing element)
	M	Remote - Transmitter and sensing element separate Sensor enclosure: Aluminum Type 4, IP66 Electronics enclosure: Polycarbonate Type 4, IP54 Explosion-Proof / Flame-Proof sensor: CSA and IECEx Non-incendive electronics: CSA Ex nA IIC, T4 (electronics enclosure) Ex d IIB + H2 Gb, T4 or T3 (sensing element)

F7	Option	Display / Keypad
	1	Display / Keypad
	2	Blind

F8	Option	Power
	A	AC (85-265V 47/63 Hz, 24 watts max)
	D	DC (24V ±10%), 1 A max.

F9	Option	Analog and Digital Inputs/Output
	2	Standard Two 4-20mA isolated outputs
	3	Full Two 4-20mA isolated outputs, two relays, two digital inputs, one non-isolated 4-20mA input
	5	HART-1 One 4-20mA isolated output, two relays, two digital inputs, one non-isolated 4-20mA input
	6	HART-2 Two 4-20mA isolated outputs, two relays, two digital inputs, one non-isolated 4-20mA input

F10	Option	Gas Type
	A	Air (laboratory calibration only)
	D	Biogas (methane and carbon dioxide mix)
	Y	Customer specified



F11	Option	Percent of Methane
	--	Enter two digits for percent of methane. Enter two zeros (00) for Air only. Enter YY for all other gases.

F12	Option	Velocity Calibration Range
	B	300 SFPM (1.4 NMPS)
	C	600 SFPM (2.8 NMPS)
	E	1,000 SFPM (4.7 NMPS)
	G	2,000 SFPM (9.3 NMPS)
	K	4,000 SFPM (18.6 NMPS) *
	M	6,000 SFPM (28 NMPS) * †
	P	9,000 SFPM (41.9 NMPS) * †
	R	12,000 SFPM (56 NMPS) * †
		* Reduced condensate immunity in Biogas † Reduced condensate immunity in Air

F13	Option	Calibration Type
	1	Correlation
	2	Laboratory