Vaisala Veriteq Continuous Monitoring System Common Configurations

1 Wireless Option A

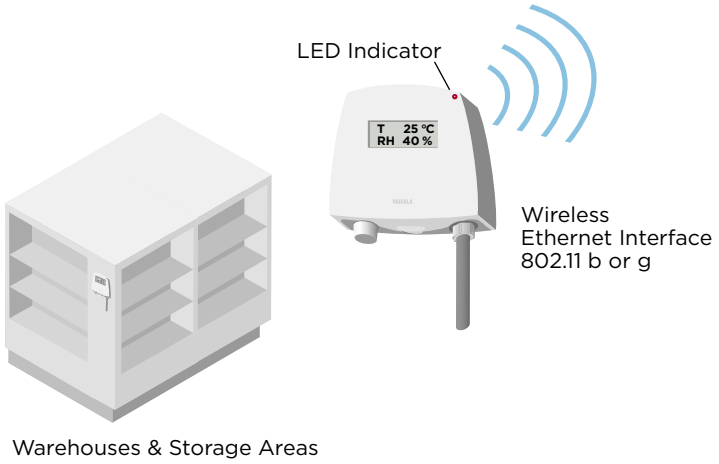

Features

- Local display and local beeper/LED alert
- External probes available
- Battery powered
- Parameters include: temperature, humidity, analog and contact inputs
- Enclosure NEMA rating: IP65

1 Wireless Option B

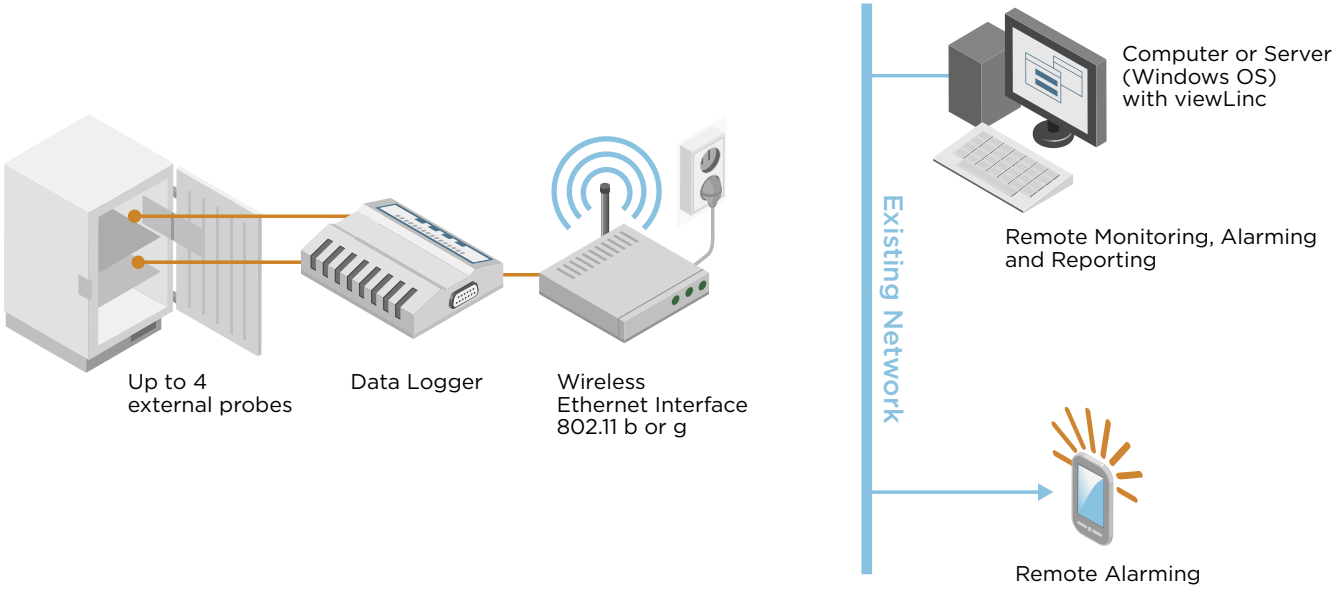

VAISALA

Vaisala Veriteq Continuous Monitoring System Common Configurations

2 Power over Ethernet vNet PoE

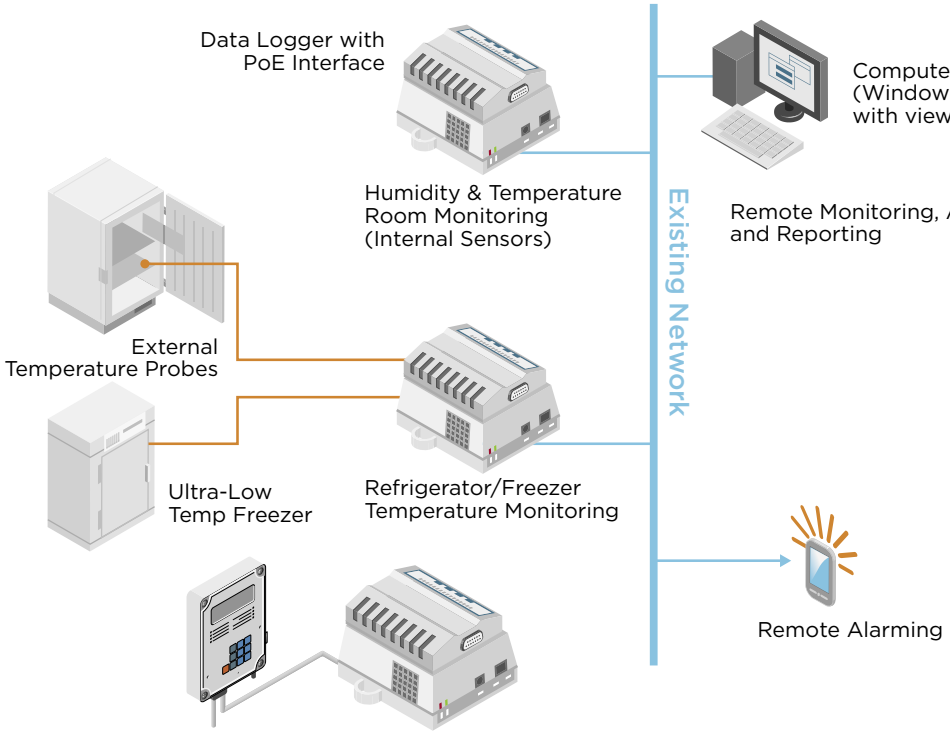

Analog Device, such as: CO_2 & O_2; Differential Pressure; Particle Monitoring, etc. (May be provided by customer)

3 Multi-port Ethernet

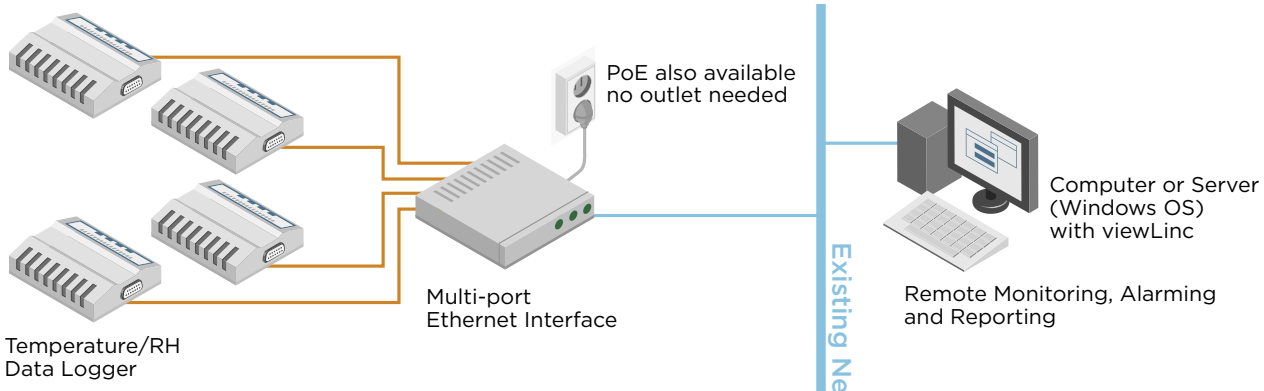

4 Direct to PC via USB

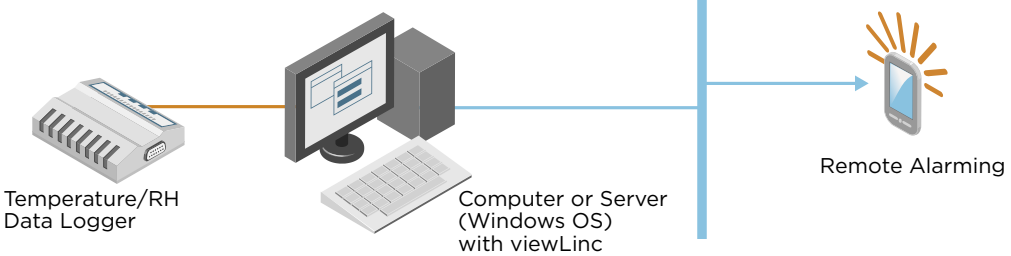

5 RH Chamber Ethernet

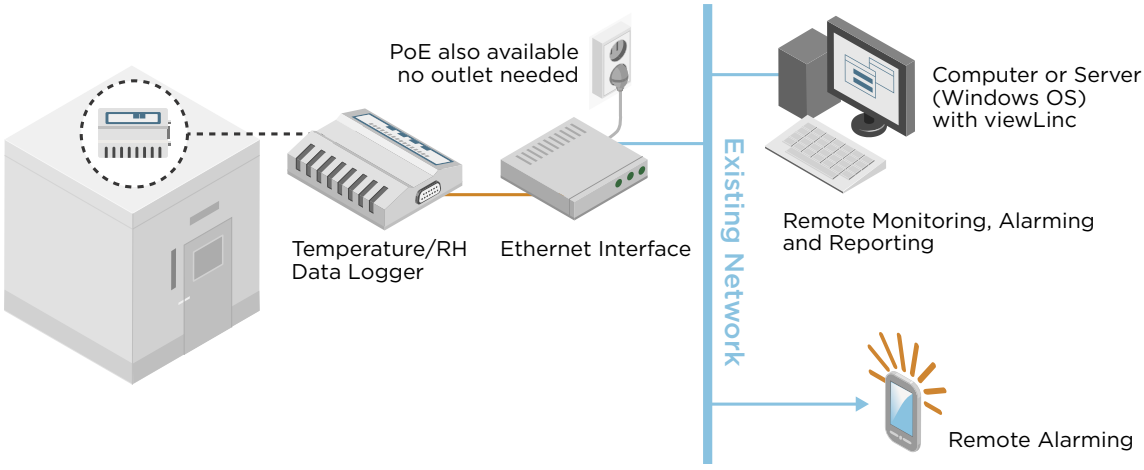

6 Premium Transmitter with Display

Features
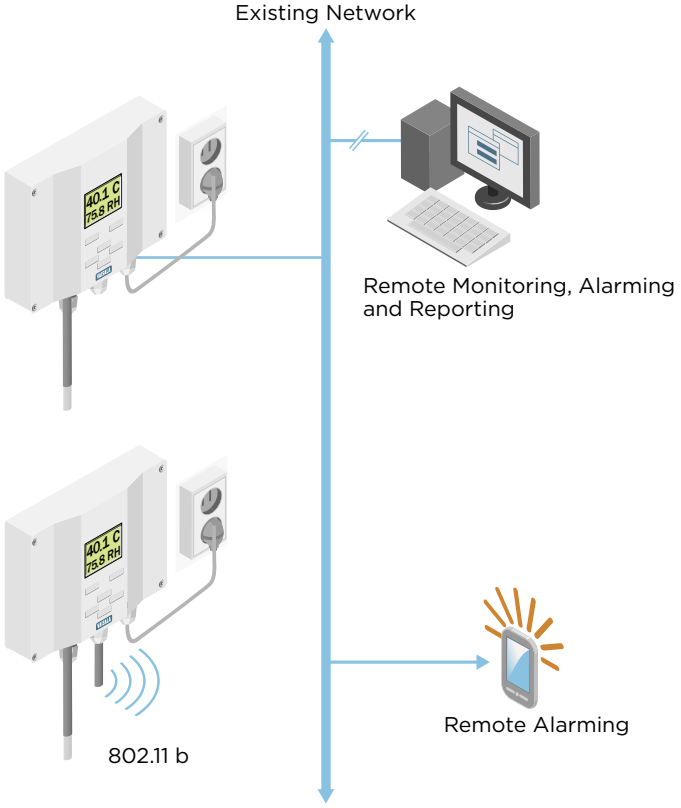
- Local display
- External probes available
- Parameters include: humidity, temperature, dewpoint, barometric pressure
- Enclosure NEMA rating: IP65